

Filterelements in V-shaped wire for breweries

Typical applications

- Malt kiln
- Mash filtration
- Fine filtration before centrifugation
- Precoat filtration candles
- Waterconditioning
- Malting

Industry type

- Malthouses
- Industrial breweries
- Micro breweries
- Pico breweries

Used products

- Welded screens (pie-shaped or longitudinal segments)
- Slottubes

Common product specifications

- MALT KILN
 - Slotopening 1.5 - 2.5 mm
 - Surface profile 28S - 34S
 - Support profile 25 x 3
- MASH FILTRATION BOTTOM
 - Slotopening 0.7 - 0.75 mm
 - Surface profile : 22S - 28S - 34S
 - Support profile : 10 x 3
 - Open area : 20% up to 30%

Alloys

- Mainly AISI 316L, other alloys available

Quality Assurance

- ISO 9001 Certified
- Trislot focusses on Total Quality Management
- 50 years of experience

Benefits


- High open area = quicker filtration
- Accurate filter rating
- Longer service life
- Low maintenance costs

References

References can be submitted on request and after discussion with our customers.



beer bottom consisting of 4 segments

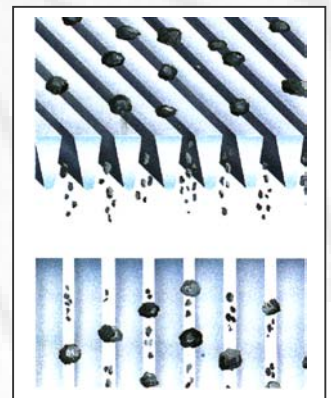

Trislot NV

Roterijstraat 134
B-8970 WAREGEM Belgium
Tel.+32-56-62.72.22. Fax+32-56-62.72.62.
E-Mail : info@trislot.be

Agent: