

Over the years Trislot has built up a vast experience in the manufacturing of cylinders used in screw presses.

Screens for screw presses

Product specification

Axial slots
Flow in to out
Support profile is spiral, welded onto surface profiles
Fixed slot with one tooling for one slot
maximum length : 1950 mm
Alloys : AISI 304 and AISI 316L, others available on request

I.D. (mm)	Surface profile	Support profile	Slot (mm)
254	22S	D45/Q35	0.25-0.75
254	28S	D45/Q35	0.5
254	34S	D45/Q35	0.3-1.0
254	42S	D45/Q35	0.5
258	42S	D45/Q35	1.0
260	22S	D45/Q35	0.5-0.75
260	28S	D45/Q35	0.25-1.0
260	42S	D45/Q35	0.25-1.0

Product advantages

strong construction
non clogging surface
perfectly round cylinder
Economically for large quantities




Product advantages

strong construction
non clogging surface
perfectly round cylinder
Economically for large quantities

Industries

manure dewatering
biogas installations
Food processing

 Trislot®

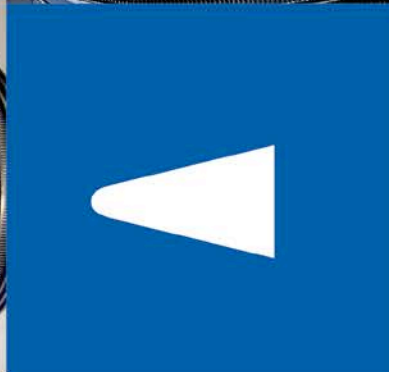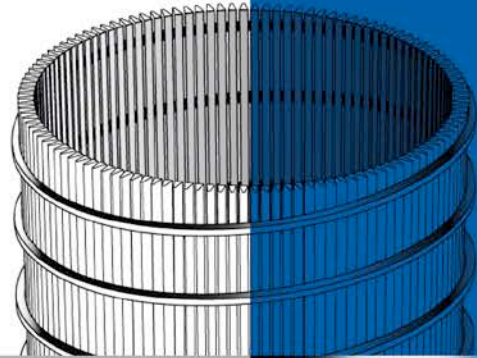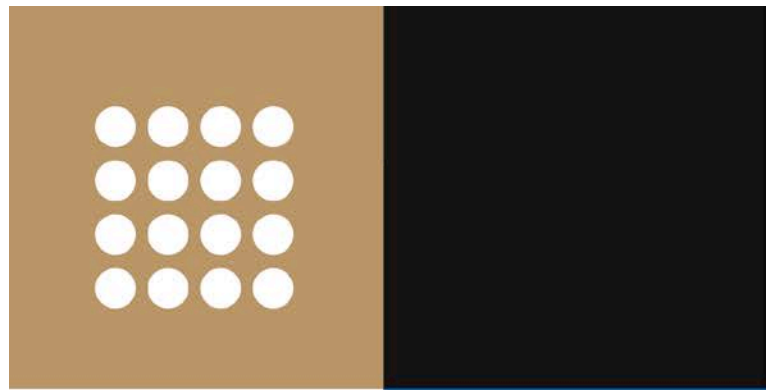

Trislot NV
Roterijstraat 134
B-8790 Waregem
Belgium
T +32 56 62 72 22
F +32 56 62 72 62
info@trislot.be
www.trislot.be